

Performance Point Assessment for Stability of Multistoried Buildings with Varying Beam Concrete Grades on Soft Soil

Himanshu Ajay Singh¹, Virendra Savaner²

¹PG Scholar, ²Assistant Professor

Civil Engineering Department, Dr. APJ Abdul Kalam University Indore, M.P., India

E-mail ids - himanshusingh61095@gmail.com ; virendrasavaner@aku.edu.in

Abstract

This paper is based on the study of diverse research paper of diverse researchers which are used diverse soil types. On the bases of hard, medium and soft soil different researchers used in a variety of structure construction so that it get reaction against the lateral loads. Based on the study it concluded that the maximum researcher is worked on the medium soil taken as a reference. The utmost amounts of research are seismic activity basis in it and few are also wind limitation basis. Under building design somehow focussed on the grade of concrete. The constancy is more in hard soil and moderate in medium soil and the foundation adoptability is more necessary in soft soil. To make sure the structure is with stand alongside all the load is acting on the structure such as self weight of the structure, live loads & lateral loads such seismic activity and wind forces. The first steps constituent of construction is foundations which are resting on the soil bed below it. The soil having different properties and phases in it. As per Indian earthquake code provision the soil may be Soft, Medium and Hard Soil and also classified based on the zone wise. So it significant to analysis structure the four different soil types phase because the landscape and strata of soil surface are differ as per the different site conditions.

Keywords: Performance Point Assessment, Multistoried Buildings, Beam Concrete Grades, Soil-Structure Interaction, Seismic Stability

Introduction

Structures are subject to diverse types of lateral loads such as seismic activity& wind loads. The performance is differing with type of soil. The kindof consist as solid soil, medium & soft soil. The fondness of different soil type when seismic waves as they pass through the soil layer. When a structure is exposed to an earthquake, it impact with the foundation & soil mass. Thus changes the movement of the earth. This shows that the type of soil, & also based on type of structure, affects the movement of the whole system of earth structures. Because

seismic waves are transmitted from the earth, they consist of modify in the properties of the soil and work in diverse ways according to the equivalent properties of the soil.

Vibrations that bother the earth's plane caused by waves generated in the earth are called earthquakes. It is said that earthquakes do not execute human life, but structures that are not built taking into account the forces of an seismic activity. Presently, earthquake-resistant structures in India attach great significance to personsafety. India is a subcontinent with more than 60% of the area in an seismic activity prone area. Most buildings built in India are designed with everlasting, semi-permanent moving loads in brain. But an seismic activity is a random weight that leads to demise, but it also violates the social circumstances of India. The degree to which the structural reaction alters the characteristics of seismic movements observed at the base level depends on the relative mass and stiffness properties of the soil and structure. Thus, the physical property of the foundation atmosphere is an significant factor in the earthquake reaction of the structures it supports. The future demand of each city will eventually contribute to attracting populace and living demand. This requirement leads to the development of a multi-story building. To oppose lateral forces and stay in place, tall structures need stability with or without any improvement in the same soil type. Optimization of stability. The issue of high construction stability has now become a major issue as communities approach cities that provide them with amenities. Along with the stability issue, another thing is optimization that maintains the efficiency of the massive structure and its load on the soil that ultimately carries it. Concrete is mainly the indisputable and necessary material that is used in construction to develop infrastructure around the world.

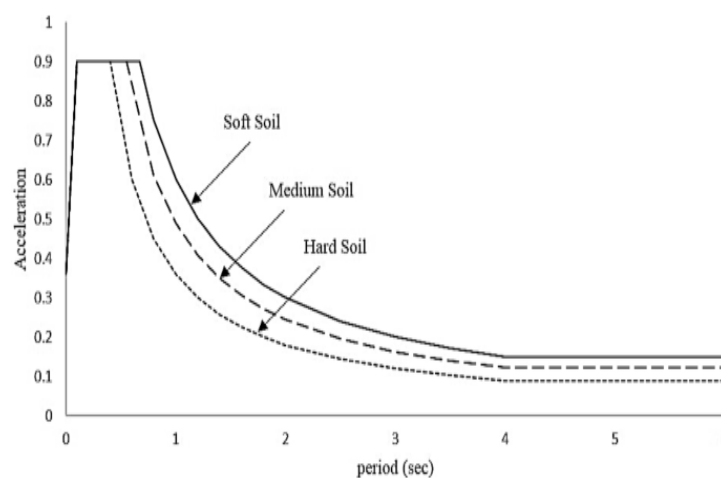


Fig. 1: Curvature between Acceleration vs. Time period of hard, medium and soft soil.

The curve is basically shown the response of earthquake. The response is in terms of vibration analysis of the structure. The vibration phenomena are taken place with structural natural time period and acceleration generated on it. The three curves are drawn in it. Hard soil is below bottom curve shown that less time and acceleration are achieved through it. Similarly the soft soil curve having maximum value so that responses are more in acceleration and time period terms. Medium soil exhibit in between them. These types of condition are vary with the site area and locality of the soil type. Hence it is important to study about stability based on hard, medium and soft soil.

Literature Review

The following literature papers are studied for the study and knowledge of Stability analysis of multi-storey building. The main emphasis on the soil type. The review on the literature is as follows:

- **Vishwakarma & Maru (2019)**

In this Project, the state of human comfort in a high-rise building under wind excitation is estimated using the peak acceleration estimate using the Indian standard code IS 875 (part 3): 2015. Consider four different frame pipes of a high-rise circular structure having G + 20, G + 30, G + 40 and G + 50 with different conditions, that is, a normal plate, a secondary beam, a waffle plate and a ribbed plate are taken. A typical round floor with a diameter of 50 m and symmetrical in plan in both main directions. Then, using ETABS-2013 software, the maximum displacement is estimated by dynamic building wind analysis using the corrosion factor method. Using maximum bias, the Acceleration Peak will be calculated using IS-875 (Part 3); 2015 for various structural conditions of scaffold pipes and construction modes. The peak acceleration obtained in the analysis is compared with the reference data provided by Smith. S.B. and the Coull book and human comfort perceived level are calculated for the Indian tertiary level of the described location of India, from which the evaluation of the effective high-rise building under dynamic wind load is analyzed.

- **Ahamad *et al.* (2020)**

In the current era or scenario, the G + 12 structure located in zone III is considered for analysis. The analysis is carried out for seismic zone III. The structural model is analyzed and compared with different porch locations for seismic zone III according to IS 1893-2016 for analyzing the response spectrum. Results are assessed for offset, line offset, baseline offset, etc. Results are obtained and presented as plots and tables for the seismic zone. A building

with a porch exposed to seismic effects with seven different locations, based on the analysis results, was obtained for seven locations of a multi-storey building. The results show several results: maximum displacement at location 7, maximum basic shear at location 1, maximum axial force at location 6, maximum column shear force at location 1, maximum location 1 of the column bending moment, beam shear force.

- **Ahamad *et. al.* (2020)**

This article provides a short description of determining the best porch location with the help of staad-pro. The analytic approach is used under it. The article aim is seismic waves effect . staad-pro approach is used under it. This article concludes that it is really important to use analytical methods before building multi-story buildings in seismic and non-seismic areas. After studying all the documents, we can easily understand the importance of analytical methods. We can easily calculate the effect of seismic loading using programs such as staad pro and E-tabs before the construction of multi-storey buildings. Calculation and modeling is the main purpose of the conclusion.

- **Kumawat *et. al.*(2020)**

In this era of multi-story building design and architectural vision, a new idea is required. The diverse competitors surrounded by them made the construction with their own choice, as well as market demand and a multi-story structure, perform extremely important work in innovative and new fields. This should explain the complexity of the production of the region, along with the architectural and structural point of view. Composite and varied floor arrangements on similar substrates require reliability with a constructive approach. These types of structures are the Twin Tower structure used in this modern globe. In this study, outcome evaluation parameters such as floor displacement and drift are derived from the props of the multi-story structure of the twin tower located in Zone III earthquakes, earthquakes impact the structure under 5 different shapes, and studied with Staadpro assistant software design

- **Khan and Pal (2020)**

The structure is now ready with a lot of modern traditions such as tall construction, etc., and there the need is met with fresh modernization and latest thoughts. Many associated innovators have used them to build a structure with their own alternative as well as market demand. The parameter estimates for consequences such as floor displacement and drift are

derived from the foundations of any multi-story structure located in an earthquake. Zone III, earthquake effects affect the building under 7 different best sized columns to reduce baseline displacement. For base shear reduction, use the best column size of columns with the same concrete class in a multistory building under seismic loading to study base shear reduction and verify with the E-Tabs design software alliance.

- **Upadhyay and Jamle (2020)**

The current work shows the literature survey of various researchers who have been contributing in this field. Conclusions with the outline of the proposed work are provided at the end of the work. It concludes the above literature review, it is found out that it is necessary to introduce stiffness increasing members in tall structures to increase the lateral load handling capacity. Various researches already done till now in terms of stability improvement. Since one side of the current theme is to increase overall stiffness to resist lateral load but the other side is; that it increases overall construction cost. To maintain these two things, wall belt supported system plays a major role. Hence wall belt supported system should be implemented in tall structures. The upcoming proposed work shows various wall belt stability cases with different grades of concrete with different thickness. The optimum case of stability by comparing all the decided cases of different thickness will be implemented and shown in upcoming papers.

- **Upadhyay and Jamle (2020)**

The shear wall belt system so introduced to make the tall structure stiff and the lateral movement of the same will be reduced. To demonstrate this, total 10 tall structures are prepared and analyzed by applying the wall belt of different thickness of different grades. After deep comparative analysis, it has been found out that Building case B7 emerges as the best wall belt grade stability case. Maximum displacement in X direction has a minimum value of 314.063 mm for Building case B7 and value of 166.992 mm obtained same in Building B7. The values are more in Building case B0 when shear belt is not used then it drastically decreases since stiffness is more when shear belt is used. Base shear values increase with increase in additional member in a structure. Building case B0 seems lesser value of base shear. Building case B4 and B7 seems lesser value of shear forces with a value of 3317.0919 KN. Maximum Axial Forces in Column for all Wall Belt Stability Cases seems lesser in Building case B7 with a minimum value of 4922.3212 KN. Shear forces in column

increases with increase in additional member in a structure and behaves same as base shear parametric value.

- **Mahajan and Jamle (2020)**

The current work is going to show the stability criteria of changing the grades of beams without altering the size at various floor levels. Total 6 cases of the current theme created and analyzed with the help of software approach after then result is compared. Result shows that the increase of stability has seen in Case BS3 and BS4 and would be recommended whenever this type of stability activity performed.

- **Malviya and Jamle (2020)**

As the current study carried out a comparative and understandable behavior of the multi storied building column component with regular and irregular grade of concrete. A software analytical approach is used for the analysis of total five similar building models with same and different grades. Different cases show its different behavior and define its own importance of grade change. At last conclusions have drawn for the efficient and final case that shows optimal location of grade change in concrete columns in a symmetric structure. Grade location case T shows least parametric values after comparison with other grade location cases.

- **Patidar and Jamle (2020)**

The current work demonstrates the destructive effects of earthquake over a multistoried building. For this, Total 12 shear wall stability case residential apartment building models are prepared and are assumed to be located at seismic zone III with shear wall located at its core. These models have different shear wall thickness viz. 0.140m, 0.160m, 0.180m and 0.200m combined with M20, M30 and M35 grades of concrete. Observing all the parameters, for making the multistoried building more stable, it is necessary to increase the thickness of shear wall members with higher concrete grade.

- **Jajoriya et al. (2020)**

The present study describes about group action of pile group, modeling of four piles were taken for study. In study, spacing between pile groups are taken as 2.5D and 3.5D (D-Diameter of pile). 0.8 is the diameter of four pile group. Different pile arrangements are taken

such as rectangular, square, staggered; diamond 1 and diamond 2. Analysis for different shapes of pile groups are done by RS method using software approach. bending moment ,Displacement, Shear force and three types of stresses are evaluated under the analysis of models.

- **Jajoriya et al. (2020)**

The paper is based on the study of pile group. It is based on the of four piles groups is carried out taking space between them as 2.5 and 3D.The dia. of piles is 0.6 and the dia. of the group of eight piles is 0.4, the form chosen to organize the group of piles is Rect., Square, 2 types of Diamond and staggered pattern. The analysis of the different groups of shape piles will be carried out using the RS method based on STAAD,Pro. Parameters such as displacement, SF and BM are taken into account for the pile group analysis. The paper concluded that other than regular grouping rectangle and diamond pattern is also play efficient role when square model is not to be preferred as per site conditions.

- **Jamle et al. (2017)**

The aim of the present study is to compare the behavior of multi-storeyed building of conventional R.C.C.,having flat slab with or without shear walls and to analyze the effect of building height on the performance under earthquake forces. Also effect of with or without shear wall for flat slab building on seismic behavior with varying thickness and varying position of shear wall are studied. In this work, the effects of seismic forces in zone V on these buildings are also carried out. For this, G+9, G+18, G+27 and G+36Storeyed models, each of plan size 20X20m are selected. For stabilization of the variable parameters, shear wall are provided at different locations. To study the effect of different location of shear wall on flat slab multi-storey building, static analysis (Equivalent Static Analysis) in software STAAD Pro is carried out for zone V. The seismic parametric studies comprise of lateral displacement, storey drift, drift reduction factor and contribution factor.

- **Nagar et al. (2020)**

Observing all the parameters, the main aim of this work has achieved with lessening the Base Shear parameter in both X and Z direction in residential cum commercial (G+18) multistoried building under seismic loading. Building beam case BCC4 observed and obtained as efficient case for beam change cases at different levels and should be recommended when this type of approach will be adopted in any earthquake zones. On other hand, Building column case CC4

observed and obtained as efficient case for column change cases at different levels and should be recommended when this type of approach will be adopted in any earthquake zones. After deep analytical approach, it has been found and studied that base shear beam reduction case BCC4 observed and obtained as efficient case for both beam change cases and column change cases at different levels and should be recommended when this type of approach will be adopted in any earthquake zones. Keywords: Base Shear Reduction, Beam cases, Bending Moments, Column cases, Concrete Grade, Displacement, Dual System, Multistoried Building, Shear Force, Shear Wall

- **Khan *et al.* (2020)**

The use of the shear wall at corners focuses the view of structural stability in present era and its use as dual system in a multistoried structure, since the major focus is to reduce the lateral loads acting on it. The research topic to reduce the lateral load in the current trend has increasing day by day. This trending expansion leads to the result in safe high rise structures. To contribute something in this, the current work shows the survey of the research works presented in shear wall usage and concrete core topics in dual structures as per Indian Standards. This study deals with the comparative analysis of the research trend on the current topic and after the survey, comprehensive outcomes are provided in conclusions that forms the objectives of the additional study. The main focus is to check the dual system with grade change in concrete with fixed thickness of shear wall members at corners that has going to be a major part of the study for upcoming proposed work.

- **Yadav *et al.* (2019)**

The reduction of the overall project budget ensures cost-effectiveness, provided that stiffness requirements are not compromised. To achieve this balance, the study was conducted in two stages: the first involving single-core shear wall buildings and the second focusing on dual-core shear wall buildings, each carried out in four phases. In the first phase, five single-core buildings with varying openings were modeled, and their analyses were performed in the second phase; similarly, six dual-core buildings with different openings were modeled in the third phase, followed by their analyses in the fourth. The results indicate that a 25% opening in single-core shear walls and a 50% opening in dual-core shear walls offer the most economical designs. Under seismic conditions, Case 5 of the single-core structures and Case 6 of the dual-core structures demonstrated the best overall performance.

Conclusion

The following conclusions are made based on the above research papers

- The Model category is based on the moment resisting framed type mostly other than this hull core; shear wall & belt also used by some of researchers.
- Comparative study of soil types with different zone of earthquake.
- Medium soil placed result are moderate under moderate magnitude, soft soil are results having more magnitude and lesser results are gets in hard soil structure.
- Comparative study of soil types with different zone of earthquake.
- The most researcher worked on medium type of soil. So that it os medium range adopted for the ansysis
- The result taken as building frame are displacement, bending & overturning moments, base shear for earthquake based so that rigidity of the structure.
- The results are varying with change in the structural frame type.
- Shear wall play an important role in the rigidity of the building.
- Grade of concrete also play important role in the strengthen of the structure.
- Static approach and linear dynamic approach is adopted.

References

- Assessment of Human Comfort Criteria of Tall Building Under Dynamic wind Loading”, *International Journal of Innovative Technology and Exploring Engineering (IJITEE)* ISSN: 2321-9653; UGC Grade A, Scopus Index Journal, Impact Factor:5.54(2018), Volume-9 Issue-2, Retrieval Number:B6688129219/2019©BEIESP,DOI:10.35940/ijitee.B6688.129219, pp 2265-2273.
- Aasif Khan, Ankit Pal(2020) “Reduction of Base Shear Using Different Size of Columns with Same Concrete Grade in Multistoried Building under Seismic Loading” *Journal of Xi'an University of Architecture & Technology*, Volume XII, Issue IV, 2020 ISSN No : 1006-7930, pp 5060-5069.
- Ahamad Abrar, Ankit Pal & et.al. (2019) “Determine the Best Location of Porch in Multistory Building with Seismic Loading” *International Journal of Current Engineering and Technology* E-ISSN 2277 – 4106, P-ISSN 2347 – 5161 pp 72-77 .
- Ahamad Abrar, Pal Ankit & et. al. (2020) “Review Analysis on Determine the Best Location of Porch in Multistory Building with and without Seismic Loading”

International Journal of Advanced Engineering Research and Science (IJAERS), Vol-7, Issue-1, <https://dx.doi.org/10.22161/ijaers.71.25> ISSN: 2349-6495(P) .2456-1908(O), pp 182-184.

- Amer Hassan & Shilpa Pal(2018) “Effect of soil condition on seismic response of isolated base buildings” *International Journal of Advanced Structural Engineering* (2018) 10:249–261
- B. Fatahi, B. F. Harry & et, al. (2014) “Soil-structure interaction vs Site effect for seismic design of tall buildings on soft soil” *Geomechanics and Engineering* 6(3):293-320.
- B. R. Jayalekshmi & H. K. Chinmayi (2014) “Effect of Soil Flexibility on Seismic Force Evaluation of RC Framed Buildings with Shear Wall: A Comparative Study of IS 1893 and E UROCODE8 *Hindawi Publishing Corporation Journal of Structures* Volume 2014, Article ID 493745, pp 1-15
- Jajoriya M., Vishwakarma A & et. al (2020), Arvind Vishwakarma “Assessment on Different Arrangement of Grouping of Piles by Response Spectrum Method” *Journal of Xi'an University of Architecture & Technology* Volume XII, Issue V, 2020 ISSN No : 1006-7930 <https://doi.org/10.37896/JXAT12.05/1446>, pp 469-480.
- Jajoriya M., Vishwakarma A & et. al. (2020) “A Review: Earthquake Analysis of Pile Group with Different Variations in Dimensions & Parameters” *International Journal for Research in Applied Science & Engineering Technology (IJRASET)* ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429 Volume 8 Issue V , <http://doi.org/10.22214/ijraset.2020.5440> pp 2639-2642
- Mahajan B , S. Jamle , Analytical Approach in Stability Enhancement Techniques by Altering Beam Members at Different Levels *International Journal of Advanced Engineering Research and Science (IJAERS)* [Vol-7, Issue-6, Jun- 2020] ISSN: 2349-6495(P) | 2456-1908(O), pp 301-308.
- Malviya R. and Jamle s. (2020) Increasing Stability of Multistoried Building using Different Grades of Concrete in Column Member Sets at Different Locations Received 01 Jan 2020, Accepted 02 March 2020, Available online 03 March 2020, Vol.10, No.2 (March/April 2020) , pp 208-217.
- Patidar M., Jamle S.(2020) Optimization of Stability of Multistoried Structure by Changing Grades of Concrete in Shear Wall Member *Journal of Xi'an University of Architecture & Technology* Volume XII, Issue IV, 2020 ISSN No : 1006-7930 , pp 2479-2797.

- Qudsia Bhavikatti , Swapnil B. Cholekar,(2017) Soil structure interaction effect for a building resting on sloping ground including infill subjected to seismic analysis. Qudsia Bhavikatti 1, Swapnil B. Cholekar International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395-0056 Volume: 04 Issue: 07 p-ISSN: 2395-0072
- S.V. Jitesh T Chavda PG Student & *et. al.* (2013) Proceedings of Indian Geotechnical Conference December 22-24, Roorkee Seismic Behaviour Of Buildings On Different Types of Soil Ketan Bajaj, S.V. Jitesh T Chavda PG Student, Bhavik M Vyas
- Upadhyay D. K. and S. Jamle (2020) “A Review on Stability Improvement with Wall Belt Supported Dual Structural System Using Different Grades of Concrete” *International Journal of Advanced Engineering Research and Science (IJAERS)*, Vol-7, Issue-3.
- Upadhyay D. K. and S. Jamle (2020), Vol.10, No.2 (March/April 2020) pp 237-242. *International Journal of Current Engineering and Technology* E-ISSN 2277 – 4106, P-ISSN 2347 – 5161.
- Vishwakarma A. (2020) Optimum Use of Fly Ash (FA) and Glass Powder (GP) as a Partial Replacement for Cement in Concrete, Page No. : 1182-1186, <http://doi.org/10.22214/ijraset.2020.4192>
- Vishwakarma A.(2020) Optimum Use Dismantle Concrete As A Recycled Aggregate In Concrete” *International Journal of Engineering Applied Sciences and Technology*, Vol. 4, Issue 12, ISSN No. 2455-2143, may 2020.pp 159-162, [DOI: 10.33564/IJEAST.2020.v04i12.022](https://doi.org/10.33564/IJEAST.2020.v04i12.022)